


# HT72-156M-C

Big Size: Cell 158.75\*79.375

**390W / 395W**  
**400W / 405W / 410W**

- Module Efficiency: 20.4%
- No. of Cells: 144 (6 × 24)
- Weight: 22.5kg
- Dimensions: 2008mm×1002mm×35mm

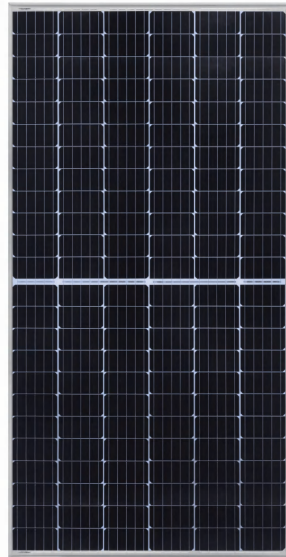

● (Optional)  
Design of Water  
Leakage Trough

Monocrystalline  
158.75 × 79.375mm



Shanghai Aerospace Automobile  
Electromechanical Co., Ltd.  
website: www.ht-saae.com



Factory:  
Lianyungang ShenZhou New Energy Co., Ltd.  
Turkey HT Solar Energy Joint Stock Company



**Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.**



**The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption**

**12Ys**  
**Products**  
**Warranty**



**Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs**

**25Ys**  
**Warranty on**  
**power output**



**All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.**

**EL**  
**Microcrack resistant enhance reliability, triple EL tested of high quality control.**

**5W**

**Positive tolerance 0/+5w guaranteed**



**Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)**

**PID**

**PID Resistant**

**Comprehensive and first-rate certification system**

IEC61215: 2016, IEC61730: 2016 Latest Standard  
ISO9001, ISO14001 and ISO45001,  
meeting the highest international standards  
Strict quality control




CEC Listed



Bloomberg  
TIER 1

### 390W/395W/400W/405W/410W

#### Engineering Drawing

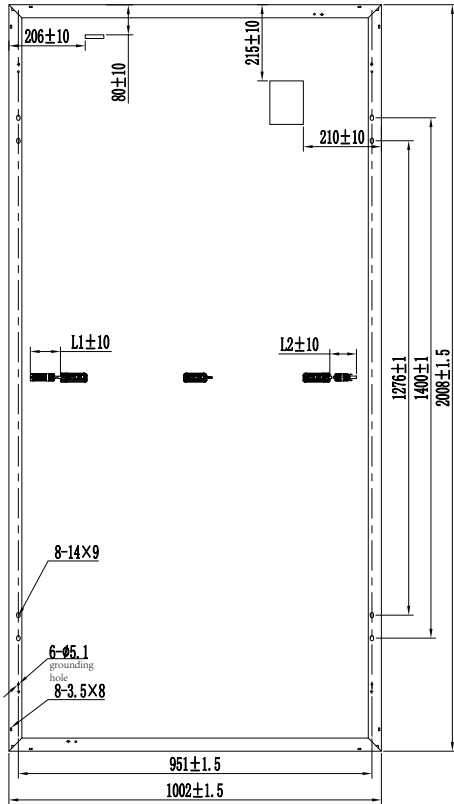

#### Electrical Characteristics

Module	HT72-156M-C				
Maximum Power at STC(Pmax)	390W	395W	400W	405W	410W
Open-Circuit Voltage(Voc)	48.5V	48.6V	48.7V	48.8V	48.9V
Short-Circuit Current(Isc)	10.55A	10.67A	10.79A	10.91A	11.03A
Optimum Operating Voltage (Vmp)	40.3V	40.5V	40.7V	40.9V	41.1V
Optimum Operating Current(Imp)	9.68A	9.76A	9.84A	9.91A	9.98A
Module Efficiency	19.4%	19.6%	19.9%	20.1%	20.4%
Power Tolerance	0 ~ +5W				
Maximum System Voltage	1000V / 1500V DC(IEC)				
Maximum Series Fuse Rating	20A				
Operating Temperature	-40 °C to +85 °C				

\*STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25, AM=1.5  
Optional black frame or white frame module according to customer requirements

#### NMOT

Module	HT72-156M-C				
Maximum Power	289W	293W	296W	300W	304W
Open Circuit Voltage (Voc)	45.8V	45.9V	46.0V	46.1V	46.2V
Short Circuit Current (Isc)	8.52A	8.62A	8.71A	8.81A	8.91A
Maximum Power Voltage (Vmp)	38.1V	38.3V	38.5V	38.6V	38.8V
Maximum Circuit Current (Imp)	7.59A	7.65A	7.69A	7.77A	7.84A
NMOT	45°C ± 2°C				

\*NMOT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20 °C, wind speed 1 m/s

#### Mechanical Characteristics


Solar Cells	Monocrystalline 158.75 × 79.375mm
No. of Cells	144 (6 × 24)
Dimensions	2008mm × 1002mm × 35mm
Weight	22.5 kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm <sup>2</sup> (IEC) Length:(+)200mm, (-)300mm
Connectors	MC4 / MC4 Compatible
Packaging Configuration	31pcs / box, 682pcs / 40'HQ Container

#### Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.39%/K
Temperature Coefficient of Voc	β (Voc)	-0.29%/K
Temperature Coefficient of Isc	α (Isc)	0.049%/K


#### I-V Curves

Current-Voltage & Power-Voltage Curve

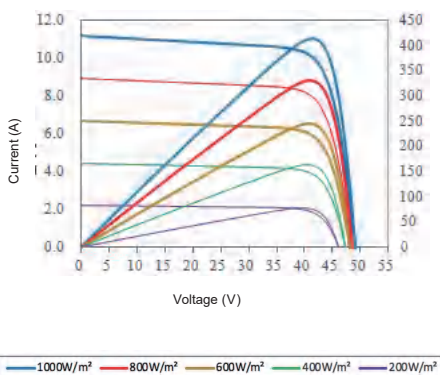

#### Warranty

12-year product warranty  
25-year warranty on power output  
Specific information is referred to the product quality guarantee



#### Information Box