


光伏线缆 Single-core Solar Cable

- 双层绝缘，光辐射交联
- 卓越的全天候适应能力，抗UV，耐油，耐脂，耐氧，耐臭氧
- 卓越的耐磨损能力
- 无卤，阻燃，低毒材质
- 卓越的柔软性和剥离性
- 高电流承载能力
- Dual wall insulation, electron beam cross-linked
- Excellent resistance to UV, water, ozone, fluids, salt, general weathering
- Excellent resistance to abrasion
- Halogen free, flame retardant, low toxicity
- Excellent flexibility and stripping performance
- High current carrying capacity

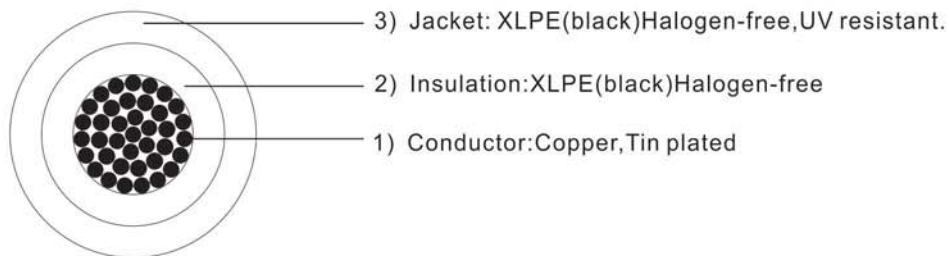

技术参数 Technical Data

规格 Size	截面 Cross Section	导体结构 Conductor Structure	参考外径 Outer Diameter	最大导体直流电阻(20℃) Max.DC Resistance at 20℃	额定电流 Rated Current
	mm ²	mm	mm	Ω/KM	A
1×2.5mm ²	2.5mm ²	48×∅0.25	5.3	8.06	30A
1×4.0mm ²	4.0mm ²	56×∅0.30	6.2	4.97	50A
1×6.0mm ²	6.0mm ²	81×∅0.30	7.1	3.52	70A
1×10.0mm ²	10.0mm ²	74×∅0.40	7.8	2.12	95A